


JCC-V680S

Technical drawing of a square monument with a circular center and four radiating pillars. Dimensions are provided: a vertical side of 3.600, a diagonal of 5.090, an outer diagonal of 5.700, and a base width of 430 (labeled as base width).

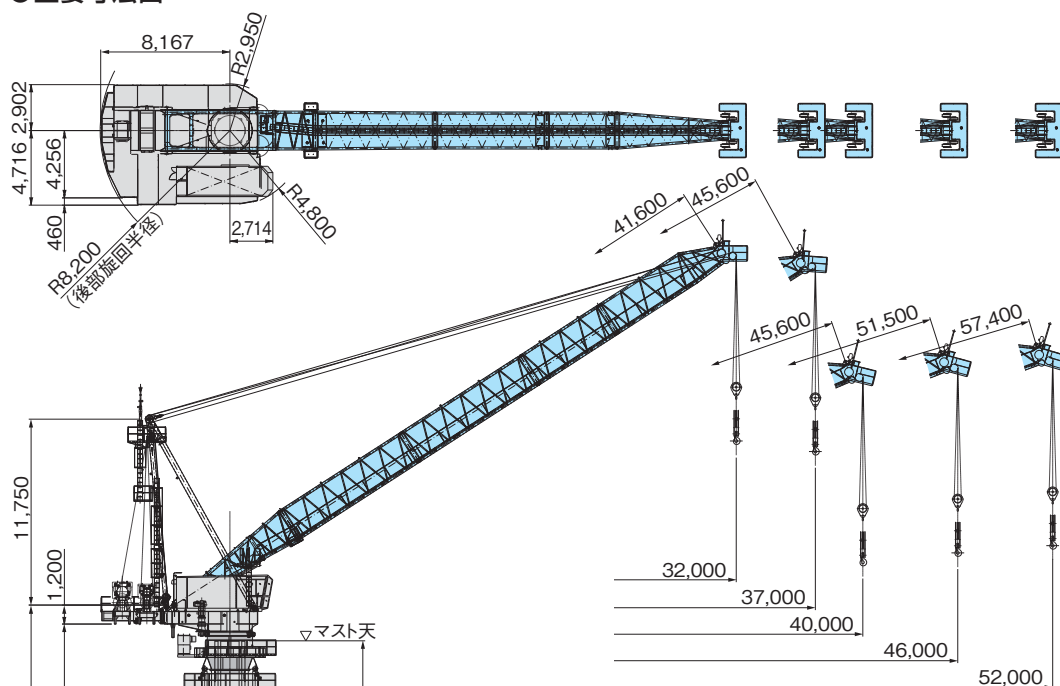

● 定格荷重曲線図

↑ 定格荷重 (t)

→ 作業半径 (m)

41.6mジブ 45.6mジブ 45.6mジブ 51.5mジブ 57.4mジブ

25 20 15.5 14 10.5 7.5 5 0

3.5 5 10 15 20 24.5 25 26 26.5 27 30 32 35 37 40 45 46 50 52

型 式		J C C - V 6 8 0 S					
ジ ブ 長 さ m		41.6	45.6	45.6	51.5	57.4	
定 格 荷 重 t		20	15.5	14	10.5	7.5	
作 業 半 径 m		32	37	40	46	52	
場 程 m		250					
速 度	巻上 m/s(m/min)	0.37~1.83 (22.0~110.0)					
	起 伏 s	107	123	133	153	173	
	旋回 rad/s (rpm)	0~12.5t	0.05 (0.5)				0.04(0.41)
		12.5~18t	0.031 (0.31)				0.02(0.22)
		18~25t	0.021 (0.21)				0.01(0.15)
昇降 m/s(m/min)		0.003/0.0038 (0.19/0.23)					
電 源 V.Hz		AC400/440 50/60					
全負荷出力 kW		177 (巻上110 起伏45 旋回22)					
全装備質量 t		172.43					
機械コード		64257					